


Amplifier Transistor

PNP Silicon



2N5087

Motorola Preferred Device



CASE 29-04, STYLE 1
TO-92 (TO-226AA)

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V _{CEO}	50	Vdc
Collector-Base Voltage	V _{CBO}	50	Vdc
Emitter-Base Voltage	V _{EBO}	3.0	Vdc
Collector Current — Continuous	I _C	50	mAdc
Total Device Dissipation @ T _A = 25°C Derate above 25°C	P _D	625 5.0	mW mW/°C
Total Device Dissipation @ T _C = 25°C Derate above 25°C	P _D	1.5 12	Watts mW/°C
Operating and Storage Junction Temperature Range	T _J , T _{Stg}	-55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	R _{θJA}	200	°C/W
Thermal Resistance, Junction to Case	R _{θJC}	83.3	°C/W

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage ⁽¹⁾ (I _C = 1.0 mA, I _B = 0)	V _{(BR)CEO}	50	—	Vdc
Collector-Base Breakdown Voltage (I _C = 100 μA, I _E = 0)	V _{(BR)CBO}	50	—	Vdc
Collector Cutoff Current (V _{CB} = 35 Vdc, I _E = 0)	I _{CBO}	—	50	nAdc
Emitter Cutoff Current (V _{EB} = 3.0 Vdc, I _C = 0)	I _{EBO}	—	50	nAdc

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

Preferred devices are Motorola recommended choices for future use and best overall value.

(Replaces 2N5086/D)

2N5087**ELECTRICAL CHARACTERISTICS** ($T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

Characteristic	Symbol	Min	Max	Unit
ON CHARACTERISTICS				
DC Current Gain ($I_C = 100 \mu\text{A}_{\text{dc}}$, $V_{CE} = 5.0 \text{ V}_{\text{dc}}$) ($I_C = 1.0 \text{ mA}_{\text{dc}}$, $V_{CE} = 5.0 \text{ V}_{\text{dc}}$) ($I_C = 10 \text{ mA}_{\text{dc}}$, $V_{CE} = 5.0 \text{ V}_{\text{dc}}$) ⁽¹⁾	h_{FE}	250 250 250	800 — —	—
Collector-Emitter Saturation Voltage ($I_C = 10 \text{ mA}_{\text{dc}}$, $I_B = 1.0 \text{ mA}_{\text{dc}}$)	$V_{CE(\text{sat})}$	—	0.3	V_{dc}
Base-Emitter On Voltage ($I_C = 1.0 \text{ mA}_{\text{dc}}$, $V_{CE} = 5.0 \text{ V}_{\text{dc}}$)	$V_{BE(\text{on})}$	—	0.85	V_{dc}

SMALL-SIGNAL CHARACTERISTICS

Current-Gain — Bandwidth Product ($I_C = 500 \mu\text{A}_{\text{dc}}$, $V_{CE} = 5.0 \text{ V}_{\text{dc}}$, $f = 20 \text{ MHz}$)	f_T	40	—	MHz
Collector-Base Capacitance ($V_{CB} = 5.0 \text{ V}_{\text{dc}}$, $I_E = 0$, $f = 1.0 \text{ MHz}$)	C_{cb}	—	4.0	pF
Small-Signal Current Gain ($I_C = 1.0 \text{ mA}_{\text{dc}}$, $V_{CE} = 5.0 \text{ V}_{\text{dc}}$, $f = 1.0 \text{ kHz}$)	h_{fe}	250	900	—
Noise Figure ($I_C = 20 \mu\text{A}_{\text{dc}}$, $V_{CE} = 5.0 \text{ V}_{\text{dc}}$, $R_S = 1.0 \text{ k}\Omega$, $f = 1.0 \text{ kHz}$) ($I_C = 100 \mu\text{A}_{\text{dc}}$, $V_{CE} = 5.0 \text{ V}_{\text{dc}}$, $R_S = 3.0 \text{ k}\Omega$, $f = 1.0 \text{ kHz}$)	NF	— —	2.0 2.0	dB

1. Pulse Test: Pulse Width $\leq 300 \mu\text{s}$, Duty Cycle $\leq 2.0\%$.

TYPICAL NOISE CHARACTERISTICS

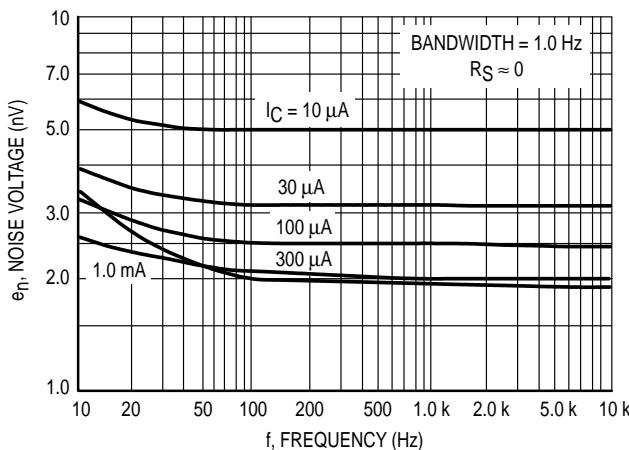
(V_{CE} = -5.0 Vdc, T_A = 25°C)

Figure 1. Noise Voltage

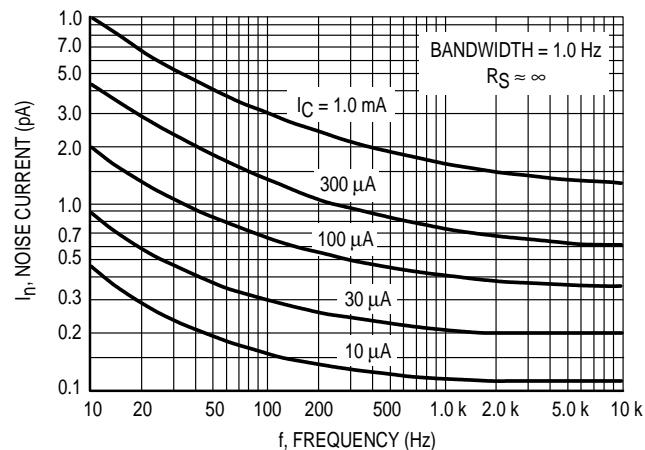


Figure 2. Noise Current

NOISE FIGURE CONTOURS

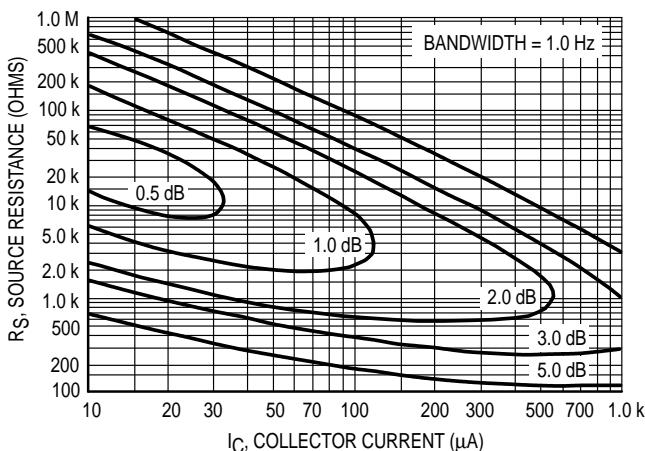
(V_{CE} = -5.0 Vdc, T_A = 25°C)

Figure 3. Narrow Band, 100 Hz

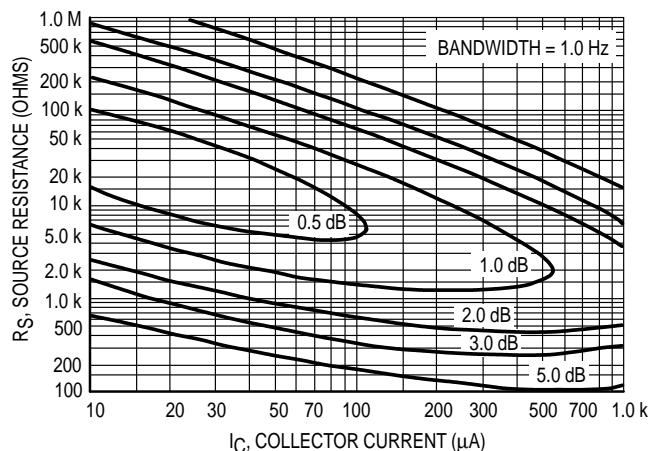


Figure 4. Narrow Band, 1.0 kHz

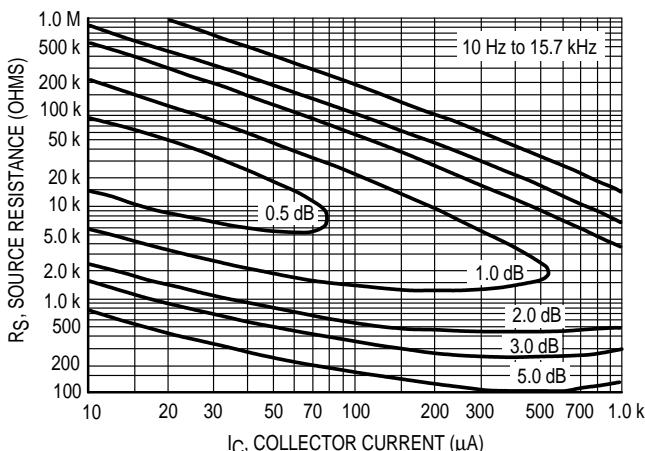


Figure 5. Wideband

Noise Figure is Defined as:

$$NF = 20 \log_{10} \left[\frac{e_n^2 + 4KTR_S + I_n^2 R_S^2}{4KTR_S} \right]^{1/2}$$

 e_n = Noise Voltage of the Transistor referred to the input. (Figure 3) I_n = Noise Current of the Transistor referred to the input. (Figure 4)K = Boltzman's Constant ($1.38 \times 10^{-23} \text{ J/K}$)T = Temperature of the Source Resistance ($^\circ\text{K}$) R_S = Source Resistance (Ohms)

TYPICAL STATIC CHARACTERISTICS

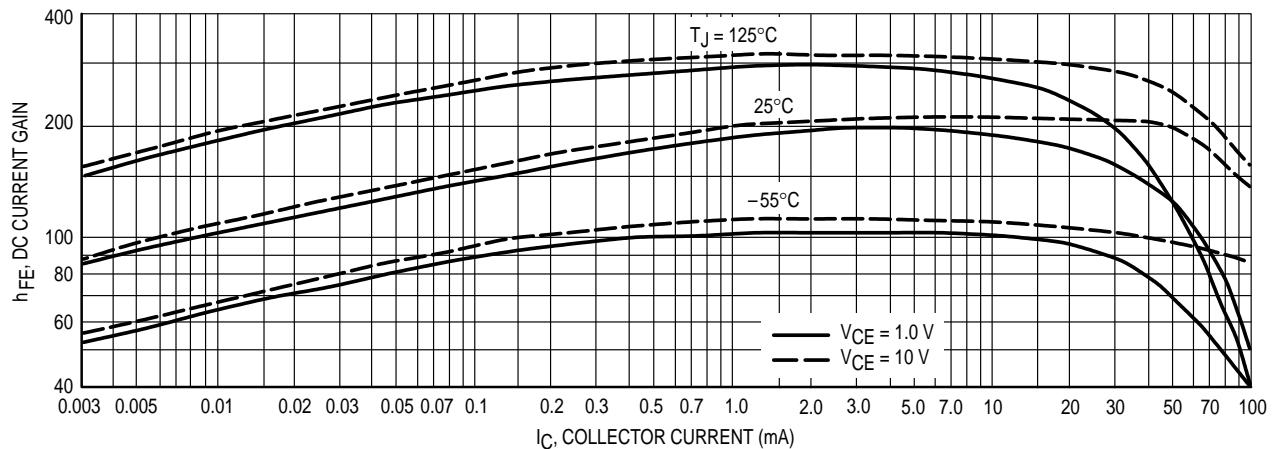


Figure 6. DC Current Gain

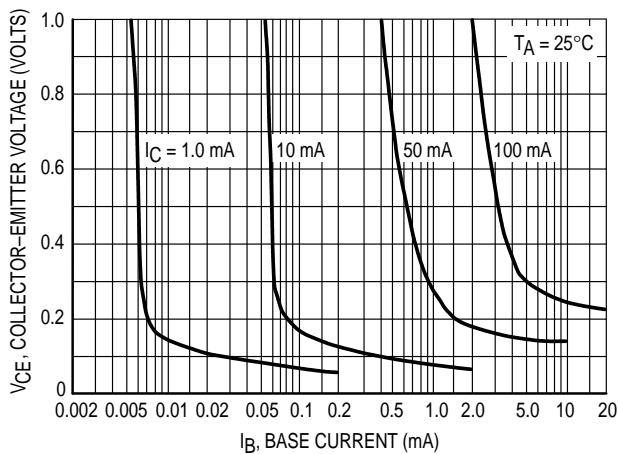


Figure 7. Collector Saturation Region

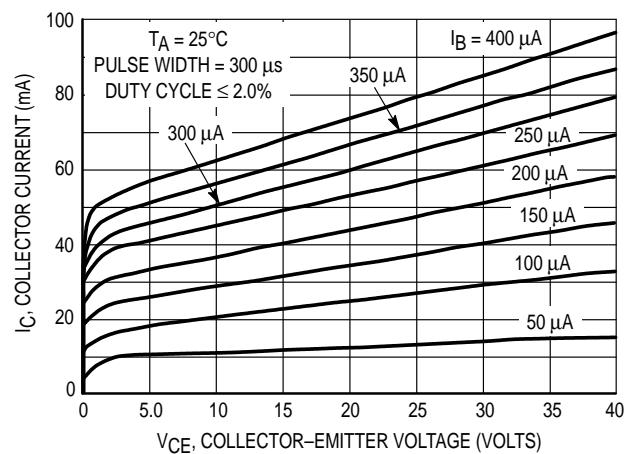


Figure 8. Collector Characteristics

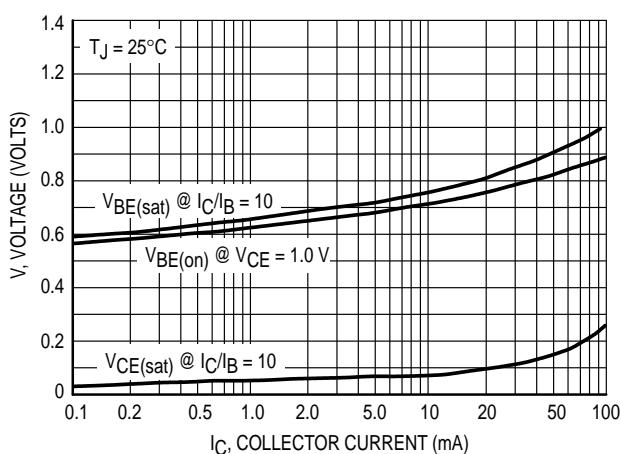


Figure 9. "On" Voltages

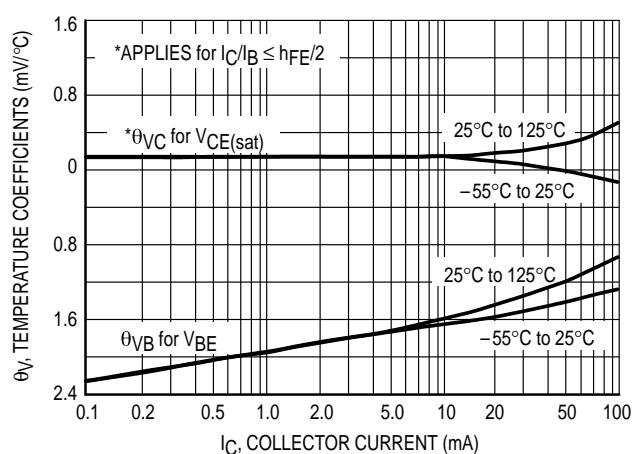


Figure 10. Temperature Coefficients

TYPICAL DYNAMIC CHARACTERISTICS

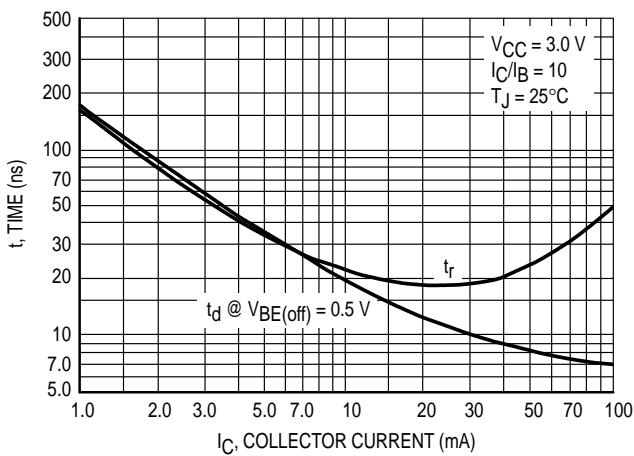


Figure 11. Turn-On Time

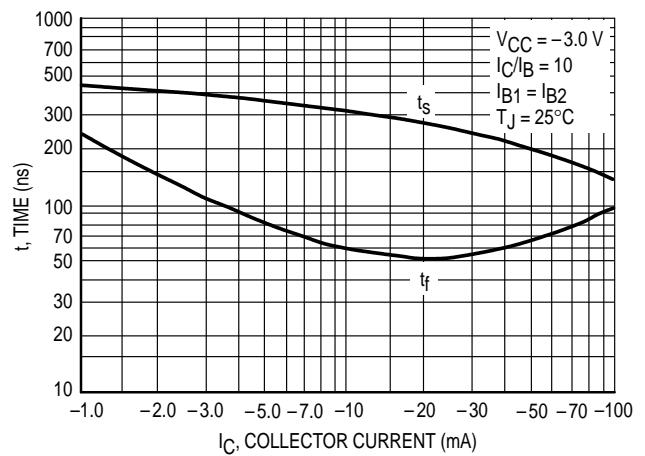


Figure 12. Turn-Off Time

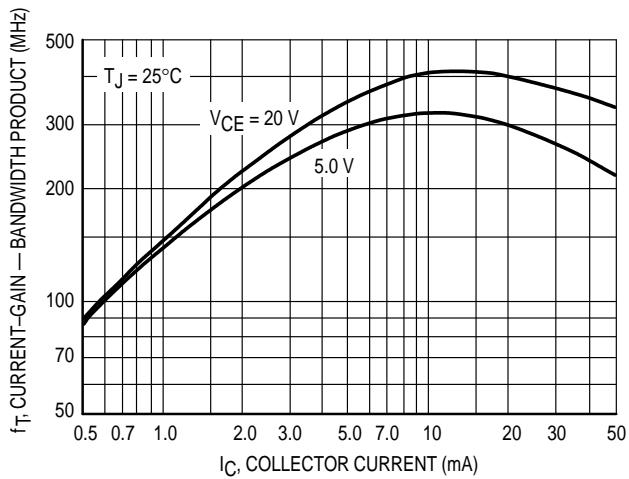


Figure 13. Current-Gain — Bandwidth Product

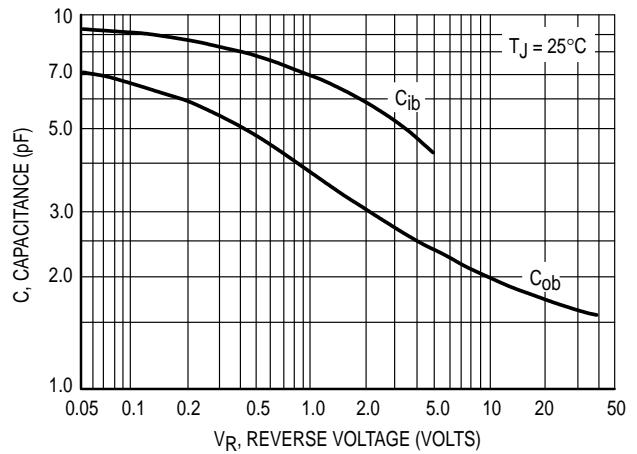


Figure 14. Capacitance

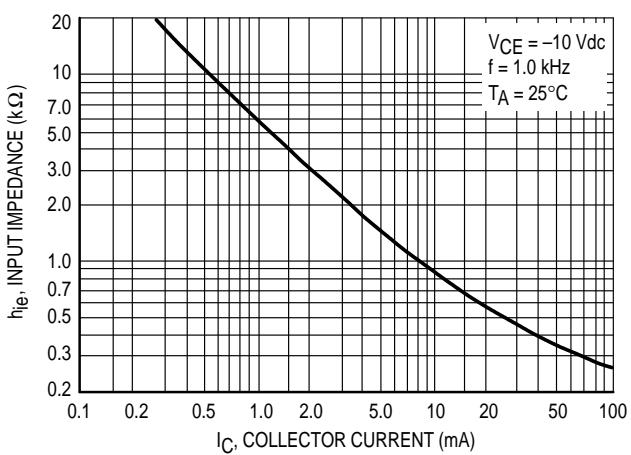


Figure 15. Input Impedance

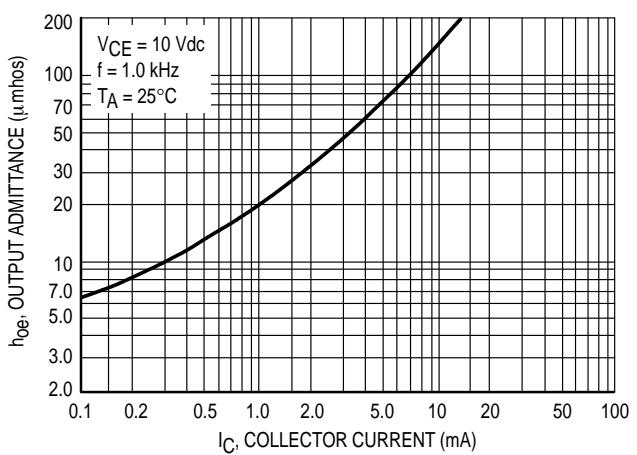


Figure 16. Output Admittance

2N5087

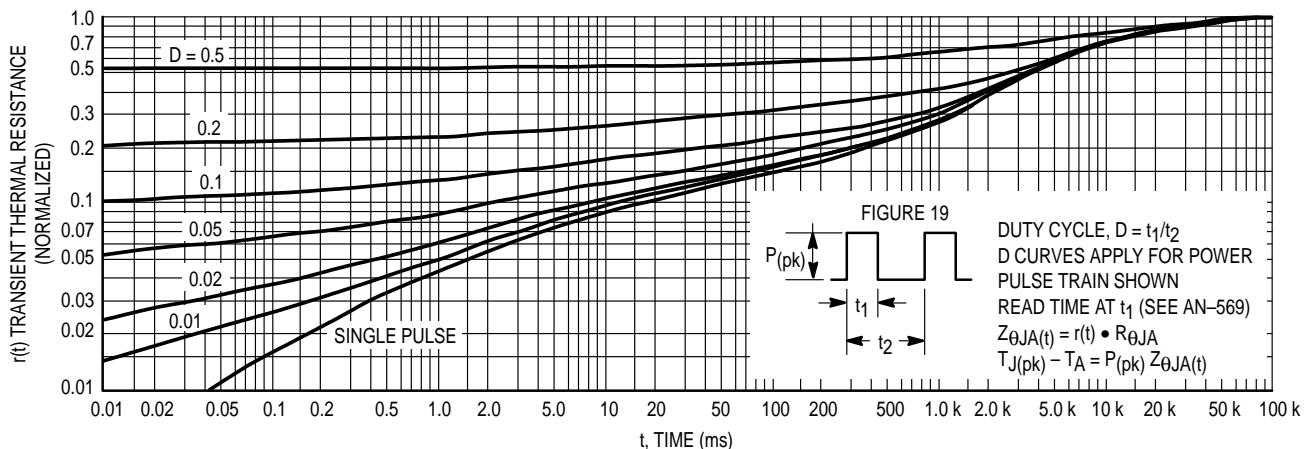


Figure 17. Thermal Response

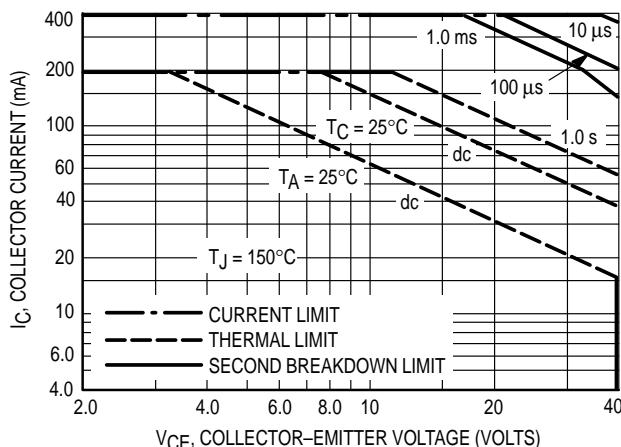


Figure 18. Active-Region Safe Operating Area

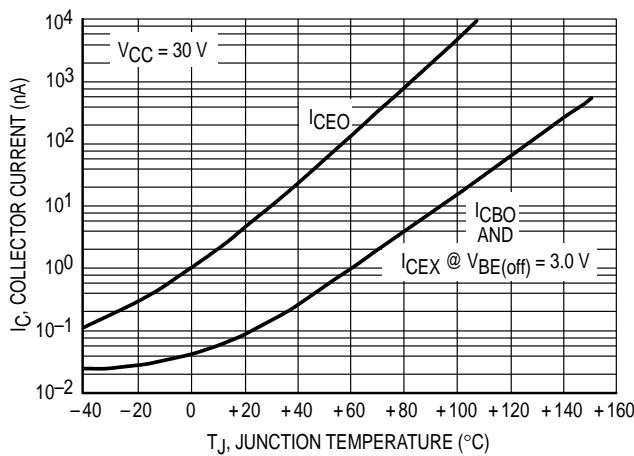


Figure 19. Typical Collector Leakage Current

The safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation. Collector load lines for specific circuits must fall below the limits indicated by the applicable curve.

The data of Figure 18 is based upon $T_J(pk) = 150^\circ C$; T_C or T_A is variable depending upon conditions. Pulse curves are valid for duty cycles to 10% provided $T_J(pk) \leq 150^\circ C$. $T_J(pk)$ may be calculated from the data in Figure 17. At high case or ambient temperatures, thermal limitations will reduce the power than can be handled to values less than the limitations imposed by second breakdown.

DESIGN NOTE: USE OF THERMAL RESPONSE DATA

A train of periodical power pulses can be represented by the model as shown in Figure 19. Using the model and the device thermal response the normalized effective transient thermal resistance of Figure 17 was calculated for various duty cycles.

To find $Z_{\theta JA}(t)$, multiply the value obtained from Figure 17 by the steady state value $R_{\theta JA}$.

Example:

The 2N5087 is dissipating 2.0 watts peak under the following conditions:

$$t_1 = 1.0 \text{ ms}, t_2 = 5.0 \text{ ms } (D = 0.2)$$


Using Figure 17 at a pulse width of 1.0 ms and $D = 0.2$, the reading of $r(t)$ is 0.22.

The peak rise in junction temperature is therefore

$$\Delta T = r(t) \times P(pk) \times R_{\theta JA} = 0.22 \times 2.0 \times 200 = 88^\circ C.$$

For more information, see AN-569.

PACKAGE DIMENSIONS

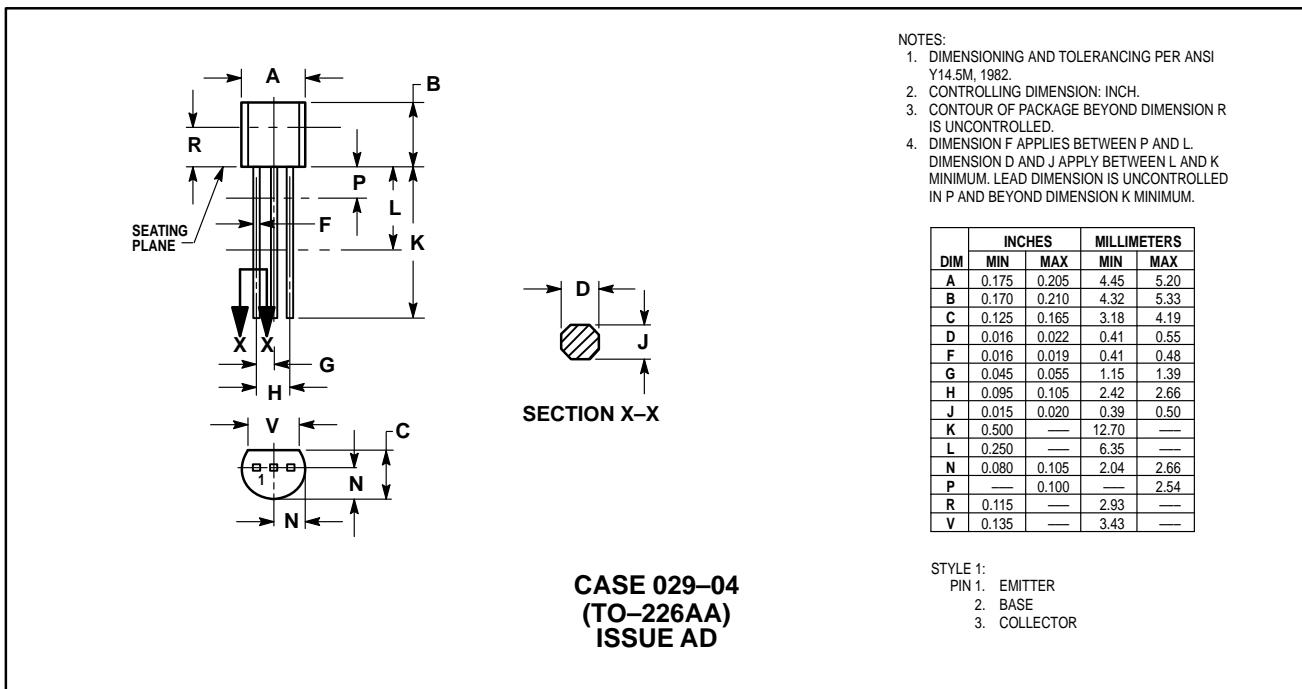

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 303-675-2140 or 1-800-441-2447

JAPAN: Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4-32-1,
Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan. 81-3-5487-8488

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 602-244-6609
– US & Canada ONLY 1-800-774-1848

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

INTERNET: <http://motorola.com/sps>

