

# 10AM11

11 Watts, 20 Volts, Class A  
Linear to 1000 MHz


## GENERAL DESCRIPTION

The 10AM11 is a COMMON EMITTER transistor capable of providing 11 Watts of Class A, RF output power to 1000 MHz. This transistor is specifically designed for general Class A amplifier applications. It utilizes gold metalization and diffused ballasting to provide high reliability and supreme ruggedness.

## ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25°C	41 Watts
<b>Maximum Voltage and Current</b>	
BVces Collector to Emitter Voltage	50 Volts
BVebo Emitter to Base Voltage	3.5 Volts
Ic Collector Current	4.0 Amps
<b>Maximum Temperatures</b>	
Storage Temperature	- 65 to +150°C
Operating Junction Temperature	+200°C

## CASE OUTLINE 55CX, STYLE 2

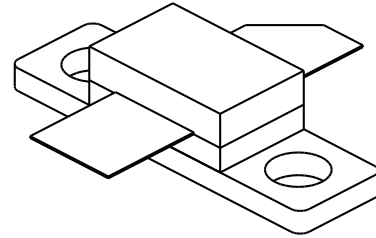

## ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
<b>Pout</b>	Power Out	F = 1.0 GHz	11.0	14.0		Watts
<b>Pin</b>	Power Input	Ic = 1.8 A			1.55	Watts
<b>Pg</b>	Power Gain	Vcc = 20 Volts	8.5	9.0		dB
<b>Ft</b>	Transition Frequency	Vce = 20 V, Ic = 1.8 A	2.0	2.5		GHz
<b>VSWR</b>	Load Mismatch Tolerance				30:1	


<b>BVebo</b>	Emitter to Base Breakdown	Ie = 12 mA	3.5			Volts
<b>BVces</b>	Collector to Emitter Breakdown	Ic = 120 mA	50			Volts
<b>BVceo</b>	Collector to Emitter Breakdown	Ic = 120 mA	24			Volts
<b>H<sub>FE</sub></b>	DC Current Gain	Vce = 5 V, Ic = 800 mA	20			
<b>Cob</b>	Output Capacitance	Vcb = 28V, f = 1.0 MHz		20		pF
<b>θjc</b>	Thermal Resistance			2.5	4.25	°C/W

Issue February 1996


GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHz RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.

**Typical Performance**


**DC SAFE OPERATING AREA**

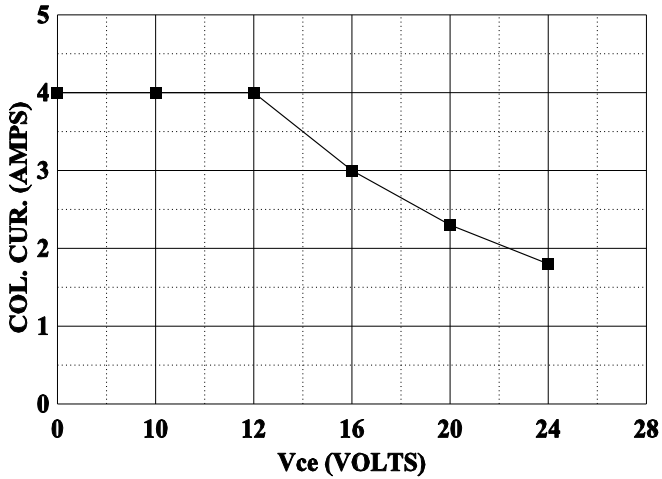


**1dB COMPRESSION POINT vs EMITTER CUR.**

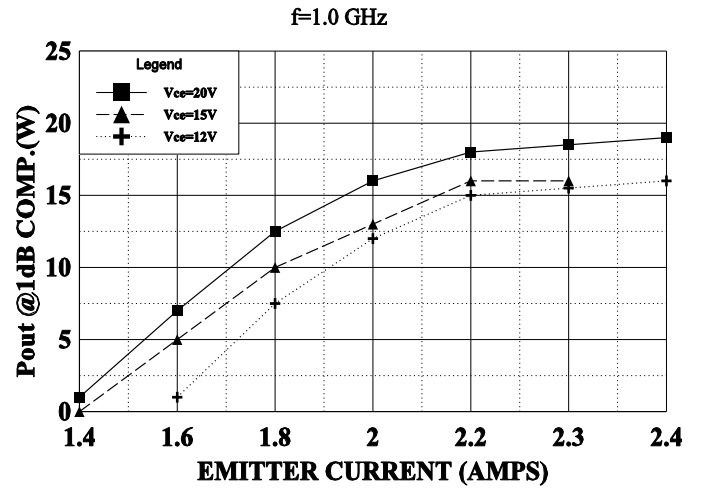

**GAIN vs COLLECTOR CURRENT**

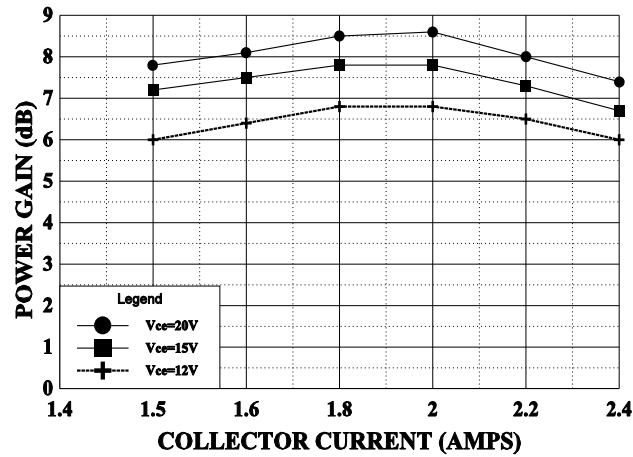

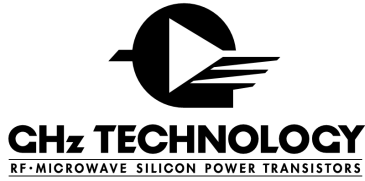

**10AM11-1 (20V, 1.8A)**

MMICAD for Windows Thu Jul 07 16:15:23 1994  
 CIRCUIT: MES

FREQ MHz	--- S11 ---		--- S21 ---		--- S12 ---		--- S22 ---	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.100	0.98179	179.752	2.82166	85.6730	0.00874	9.20481	0.80057	-175.978
0.200	0.98069	179.102	1.43410	77.2668	0.00903	13.6561	0.80330	-178.403
0.300	0.98209	178.056	0.98044	69.5957	0.00957	17.0575	0.80418	-178.832
0.400	0.97967	177.348	0.76253	62.0014	0.01021	20.5524	0.80849	-179.288
0.500	0.97651	176.635	0.63968	54.3598	0.01096	23.3701	0.81156	-179.559
0.600	0.97150	175.857	0.56451	46.2659	0.01202	26.7440	0.81685	-179.883
0.700	0.96659	175.102	0.51999	37.4192	0.01292	24.2176	0.82087	179.972
0.800	0.95982	174.637	0.49642	27.8056	0.01435	22.0506	0.82435	179.861
0.900	0.94881	173.988	0.48973	16.7753	0.01547	16.9936	0.83090	-179.940
1.000	0.93315	173.434	0.49539	3.04422	0.01655	6.96269	0.84440	-179.447
1.100	0.91190	173.557	0.50396	-14.6576	0.01609	-7.03019	0.87035	-179.245
1.200	0.89333	174.797	0.49027	-37.4307	0.01364	-28.0882	0.91041	179.877
1.300	0.89975	176.597	0.42647	-63.1821	0.00831	-52.4521	0.94090	177.352
1.400	0.92525	177.490	0.32755	-86.9847	0.00286	-95.5215	0.94744	174.394
1.500	0.95083	176.992	0.23642	-105.909	0.00334	130.047	0.94022	172.216
1.600	0.96869	176.063	0.16929	-120.895	0.00686	108.575	0.92981	170.368
1.700	0.97913	174.893	0.12170	-133.233	0.00985	94.9925	0.91970	169.023
1.800	0.98477	173.596	0.08971	-144.343	0.01184	90.4368	0.91310	167.961
1.900	0.98801	172.498	0.06662	-154.473	0.01342	82.6840	0.90560	166.700
2.000	0.99083	171.354	0.05056	-166.029	0.01562	80.6189	0.89719	165.745