


23A017

1.7 Watts, 20 Volts, Class A
Linear to 2300 MHz

GENERAL DESCRIPTION

The 23A017 is a COMMON EMITTER transistor capable of providing 1.7 Watts of Class A, RF output power to 2300 MHz. This transistor is specifically designed for general Class A amplifier applications. It utilizes gold metalization and diffused ballasting to provide high reliability and supreme ruggedness. The transistor uses a fully hermetic High Temperature Solder Sealed package.

CASE OUTLINE 55BT, STYLE 2

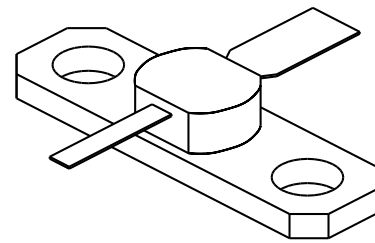

ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25°C	6.0 Watts
Maximum Voltage and Current	
BVces Collector to Emitter Voltage	50 Volts
BVebo Emitter to Base Voltage	3.5 Volts
Ic Collector Current	800 mA
Maximum Temperatures	
Storage Temperature	- 65 to + 200°C
Operating Junction Temperature	+ 200°C


ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Out	F = 2.3 GHz	1.7	2.2		Watts
Pin	Power Input	Ic = 280 mA			.38	Watts
Pg	Power Gain	Vcc = 20 Volts	6.25	7.6		dB
Ft	Transition Frequency	Vce = 20V, Ic = 280 mA	3.4	3.7		GHz
VSWR	Load Mismatch Tolerance				9:1	

BVebo	Emitter to Base Breakdown	Ie = 2 mA	3.5			Volts
BVces	Collector to Emitter Breakdown	Ic = 20 mA	50			Volts
BVceo	Collector to Emitter Breakdown	Ic = 20 mA	22			Volts
h_{FE}	DC Current Gain	Vce = 5 V, Ic = 200 mA	20			
Cob	Capacitance	Vcb = 28V, f = 1 MHz		4.8		pF
θjc	Thermal Resistance			14	16	°C/W

Initial Issue June, 1994

GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHz RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.

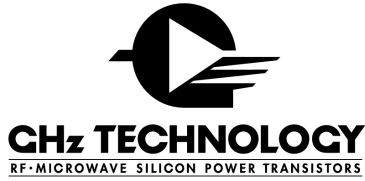

23A017-2 (20V, 280mA)

MMICAD for Windows Fri Aug 26 16:40:51 1994
 CIRCUIT: MES

FREQ Mhz	--- S11 ---		--- S21 ---		--- S12 ---		--- S22 ---	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.100	0.88100	-163.605	19.2828	108.728	0.01696	20.3017	0.40786	-108.493
0.200	0.91933	-173.623	10.1715	93.8230	0.01815	15.0322	0.33797	-134.089
0.300	0.92878	-178.162	6.88113	83.9582	0.01835	14.2324	0.33201	-143.137
0.400	0.92829	178.890	5.17666	77.4229	0.01889	15.7121	0.33829	-147.054
0.500	0.92797	176.552	4.13396	72.1900	0.01961	17.2633	0.35146	-149.085
0.600	0.92815	174.478	3.43409	66.9399	0.02020	20.6484	0.36691	-150.380
0.700	0.92879	172.692	2.93024	61.3260	0.02077	21.3137	0.38529	-151.448
0.800	0.92918	171.110	2.55303	56.5103	0.02163	23.1242	0.40451	-152.378
0.900	0.93018	169.391	2.26111	51.8779	0.02229	25.1797	0.42486	-153.325
1.000	0.93013	167.742	2.02737	47.4561	0.02354	27.0967	0.44582	-154.415
1.100	0.92855	166.099	1.83394	43.0705	0.02442	27.9353	0.46679	-155.694
1.200	0.92862	164.492	1.67430	38.7969	0.02555	28.5464	0.48814	-157.053
1.300	0.92812	162.903	1.53984	34.6105	0.02670	30.4013	0.50816	-158.620
1.400	0.93001	161.284	1.42500	30.4737	0.02791	30.2711	0.52765	-160.323
1.500	0.92981	159.592	1.32593	26.3548	0.02932	31.4205	0.54646	-162.039
1.600	0.92904	157.807	1.23713	22.2103	0.03120	31.5900	0.56433	-163.921
1.700	0.92699	155.955	1.15833	18.1552	0.03234	32.3130	0.58133	-165.915
1.800	0.92673	154.139	1.08790	14.1996	0.03410	31.9861	0.59696	-167.963
1.900	0.92543	152.289	1.02388	10.3988	0.03626	32.1420	0.61140	-169.997
2.000	0.92657	150.463	0.96863	6.69497	0.03827	32.1540	0.62506	-171.952
2.100	0.92738	148.455	0.91938	2.91897	0.04095	30.5798	0.63969	-173.949
2.200	0.92485	146.338	0.87181	-0.81298	0.04295	29.3390	0.65165	-176.080
2.300	0.91984	144.183	0.82748	-4.32557	0.04434	27.1262	0.66332	-177.960
2.400	0.91478	142.269	0.78973	-7.70741	0.04553	26.4539	0.67602	-179.717
2.500	0.91098	140.452	0.75697	-10.9869	0.04692	26.5970	0.69046	178.437
2.600	0.91075	138.500	0.72774	-14.3164	0.04875	26.5432	0.70306	176.415
2.700	0.90981	136.330	0.70053	-17.6197	0.05122	26.3291	0.71429	174.516
2.800	0.90780	134.185	0.67628	-20.8994	0.05419	25.9254	0.72683	172.617
2.900	0.90337	131.906	0.65284	-24.2352	0.05703	24.8914	0.73750	170.621
3.000	0.89919	129.639	0.63127	-27.4546	0.06055	24.1487	0.74689	168.631