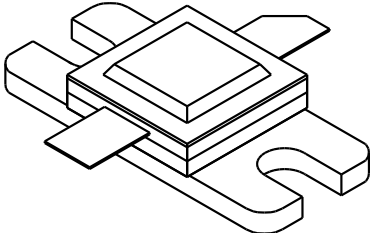


1819-35

35 Watt - 28 Volts, Class C
Microwave 1750 - 1850 MHz

<p>GENERAL DESCRIPTION</p> <p>The 1819-35 is a COMMON BASE transistor capable of providing 35 Watts of Class C, RF output power over the band 1750-1850 MHz. This transistor is designed for Microwave Broadband Class C amplifier applications. It includes Input and Output prematching and utilizes Gold metalization and diffused ballasting to provide high reliability and supreme ruggedness. The transistor uses a fully hermetic High Temperature Solder sealed package.</p>	<p>CASE OUTLINE 55AW, STYLE 1</p> 
<p>ABSOLUTE MAXIMUM RATINGS</p> <p>Maximum Power Dissipation @ 25°C 135 Watts</p> <p>Maximum Voltage and Current</p> <p>BVces Collector to Emitter Voltage 50 Volts BVebo Emitter to Base Voltage 3.5 Volts Ic Collector Current 12 A</p> <p>Maximum Temperatures</p> <p>Storage Temperature - 65 to + 200°C Operating Junction Temperature + 200°C</p>	

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Out	F = 1750-1850 MHz	35			Watt
Pin	Power Input	Vcb = 28 Volts			7	Watt
Pg	Power Gain	Pin = 7 Watts		7.0		dB
η_c	Collector Efficiency	As Above		40		%
VSWR₁	Load Mismatch Tolerance	F = 1850MHz, Pin = 7 W			10:1	

BVces	Collector to Emitter Breakdown	Ic = 20 mA	50			Volts
BVebo	Emitter to Base Breakdown	Ie = 15 mA	3.5			Volts
H_{FE}	Current Gain	Vce = 5 V, Ic = 1 A	10		100	
Cob	Output Capacitance	F = 1 MHz, Vcb = 28V				pF
θ_{jc}	Thermal Resistance				1.3	°C/W


72034

Issue August 1996

GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHz RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.


POWER OUTPUT vs FREQUENCY

V_{cc}=28V

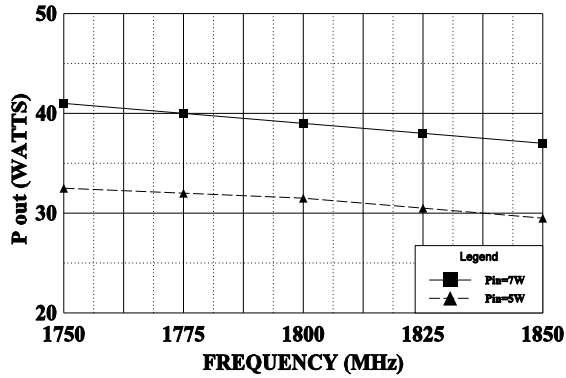


SERIES INPUT IMPEDANCE vs FREQUENCY

V_{cc}=28V, P_{in}=7W

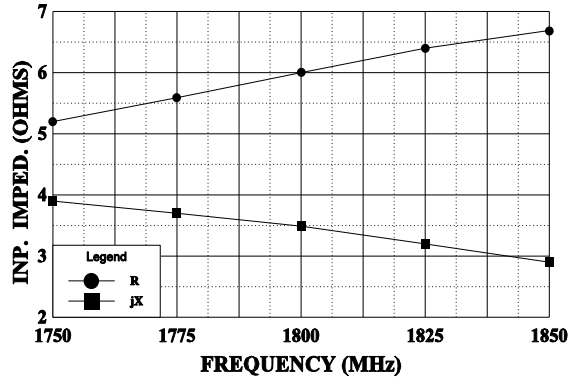

SERIES LOAD IMPEDANCE vs FREQUENCY

V_{cc}=28V, P_{in}=7W

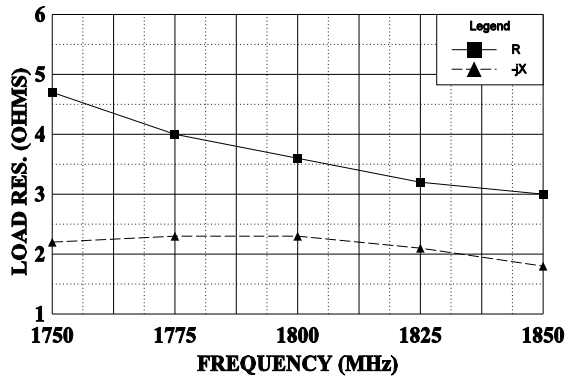

THERMAL RESISTANCE vs CASE TEMPERATURE

P_{out}=35W, V_{cc}=28V

